

PicoScope[®]

THREE-AXIS ACCELEROMETER

Vibration and Acceleration

Three-axis accelerometer and interface included

Simply plugs into any PicoScope oscilloscope

± 5 g measurement range

DC to 350 Hz frequency range




Designed for use with PicoScope oscilloscopes, compatible with most other oscilloscopes and data loggers

Connections



PicoScope 6 software

It is easy to see the output of your three-axis accelerometer by connecting it to a PicoScope oscilloscope and opening our PicoScope 6 software.

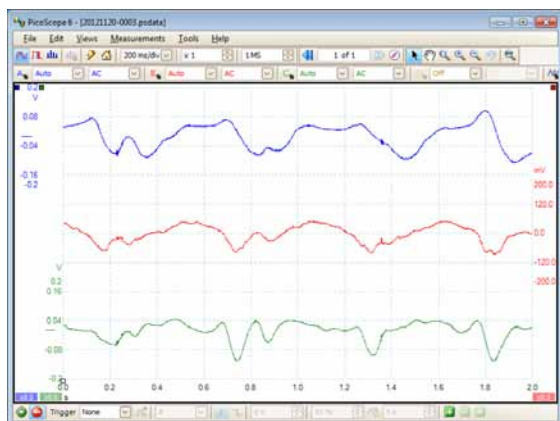

Ordering information

ORDER CODE	DESCRIPTION	*	EUR*
PP877	Three-Axis Accelerometer Kit		349

Kit contents

The PicoScope Three-Axis Accelerometer kit contains the following items:

- 1 x Accelerometer sensor
- 1 x Mounting magnet
- 1 x Sensor Interface
- 3 x BNC cables
- 1 x Quick Start Guide

Specifications

Weight (Interface/Vibration Sensor)	120 g / 80 g
Dimensions	
Sensor Interface (inc. BNCs)	105 mm x 65 mm x 27 mm
Magnet (inc. fitted grub screw)	12 mm x ø18 mm
Battery (Lithium Primary Cell)	CR123(A) 3 V
Battery life (Shelf/Vibration mode)	10 years / 6 months
Maximum measurable acceleration	±5 g
Output BNC	0-2 V DC coupled
Vibration frequency (3 dB)	DC to 350 Hz
BNC overvoltage protection	30 V
Shock survivability (sensor head)	10,000 g
Temperature range (operating)	
Sensor head	-40 °C to 85 °C
Thread mounting (sensor)	1/4" x 28 UNF
EMC approvals	CE: Meets EN61326-1:2006
Output scaling	99 to 122 mV/g
0 g output (all axes)	0.85 to 1.15 V

www.epcb.it

Pico Technology
James House
Colmworth Business Park
ST. NEOTS
PE19 8YP
United Kingdom

☎ +44 (0) 1480 396395
☎ +44 (0) 1480 396296
✉ sales@picotech.com



SISTEMI www.pcbtech.it
STRUMENTI www.epcb.it

Viale Beniamino Gigli, 15
60044 Fabriano AN
info@pcbtech.it

Tel. +39 0732 250458
Fax +39 0732 249253
C.F. / P.I. 01474230420